

### Product Description

SolarSpan® is a long-spanning commercial and residential insulated roof panel system that combines roofing, EPS-FR insulation and a pre-painted ceiling in one durable, functional and attractive roof panel. This all-in-one roofing solution is manufactured using Australian-made Colorbond® steel for durability and is installed in a variety of applications including educational facilities, multi-residential housing and retail facilities and is tested for use in cyclonic regions.

Panel Properties							
Panel Thickness (mm)	50	75	100	125	150	175	200
Typical Mass (kg/m <sup>2</sup> ) based on 0.42/0.6mm skins	10.6	10.9	11.3	11.6	12.0	12.3	12.7
SL Grade Total R-value (m <sup>2</sup> K/W)	1.4	2.1	2.7	3.3	3.9	4.6	5.2
M Grade Total R-value (m <sup>2</sup> K/W)	1.5	2.2	2.9	3.5	4.2	4.9	5.6

Note: The above Total R-values are for insulation average temperature of 15°C. Contact us for other temperatures and different EPS-FR core grades.

### Span Table

NON-CYCLONIC REGION A&B (ROOF APPLICATIONS ONLY)

SL Grade EPS-FR Core / 0.42mm Hi-tensile External / 0.6mm Internal Steel Skins.  
Maximum uniformly distributed ultimate wind load (kPa) for the given span:

Single Span, wind pressure acting outwards							
Span (mm)	Panel Thickness (mm)						
	50	75	100	125	150	175	200
1500	5.16	7.70	9.41	10.98	13.26	15.51	17.81
2700	2.35	3.74	4.63	5.55	6.78	7.99	9.28
3900	1.28	2.00	2.55	3.11	3.67	4.23	4.79
5100	-	1.21	1.53	1.86	2.19	2.52	2.85
6300	-	-	1.04	1.25	1.47	1.69	1.91
7500	-	-	0.76	0.92	1.07	1.22	1.38
8700	-	-	-	-	0.82	0.94	1.05

Multi-Span, wind pressure acting outwards							
Span (mm)	Panel Thickness (mm)						
	50	75	100	125	150	175	200
1500	4.15	5.90	7.61	7.74	7.74	7.74	7.75
2700	2.07	2.91	4.00	4.35	4.35	4.35	4.35
3900	1.17	1.72	2.41	2.95	3.04	3.04	3.05
5100	-	1.11	1.58	1.98	2.35	2.35	2.36
6300	-	-	1.10	1.40	1.77	1.93	1.93
7500	-	-	-	1.03	1.31	1.57	1.64
8700	-	-	-	-	-	1.20	1.43



Core	EPS-FR (Expanded Polystyrene with fire retardant)
Width (cover mm)	1000
Thickness (mm)	50, 75, 100, 125, 150, 175, 200
Length	Up to 24m (check for availability)
External Material	0.42mm G550 Colorbond® pre-painted steel
External Finishes	High-Rib Trapezoidal Profile
Exterior Colour Options	Classic Cream™, Surfemist®, Paperbark®, Shale Grey™, Dune®, Pale Eucalypt®, Manor Red®**, Basalt®^, Woodland Grey®^**
Internal Material	0.6mm G300 Colorbond® pre-painted steel
Internal Finishes	Plain, Elegance
Interior Colour Options	Classic Cream™, Surfemist®
Pitch	2 degree minimum, refer Bondor®
Paint System	AS/NZS 2728 & AS 1397
Acoustic Properties	Rw 24 - 25 depending on thickness
Material Group Numbers	C1.10 Group 1 & 2 <sup>a</sup>
Bushfire Attack Level	BAL-40 (All exposed core to be covered with flashing)
Fire Hazard Properties	AS/NZS 1530.3
Ignitability Index	0
Spread of Flame Index	0
Heat Evolved Index	0
Smoke Index	2-3
SMOGR <sub>RC</sub>	< 100

\*\* Limited availability.

^ Darker colours warranted for use in limited regions. Check with your local SolarSpan® dealer for more information.

a. AS5637.1 / AS ISO 9705 - BCA Group Number (Spec C1.10)

EPS-FR steel skinned insulated building panels conform to the requirements of the BCA Specification C1.10 as either Group 2 or Group 1 depending on the thickness and construction detail.

Group 1

Panel up to 250mm thick with steel 'wall-wall' and 'wall-ceiling' angles fixed with steel rivets or screws at maximum 300mm centres is classified as Group 1.

Group 2


Panel up to 150mm thick with aluminium 'wall-wall' and 'wall-ceiling' angles fixed with aluminium rivets or screws at 300mm centres is classified as Group 2. Panel thicker than 150mm requires steel 'wall-wall' and 'wall-ceiling' angles fixed with steel rivets or screws at 300mm centres to be classified as Group 2.

The technical information contained in this document cover a breadth of applications where SolarSpan® may be used, which may be outside the scope of our Codemark certificate. Data specific to CodeMark certification can be found on SolarSpan®'s CoC CM40145.


#### SPAN TABLE NOTES:

- Extended span tables including cyclonic regions C&D, multi-span, wind pressure acting inwards and 0.5mm interior skin are also available. Refer Bondor®.
- Fixing with 14g tek screws (or equivalent) at each rib are required.
- Pressures specified are for wind gusts only per AS/NZS 1170.2.
- Deflection limit of span/150 applies, and in accordance with Serviceability Limit State criteria per AS/NZS 1170.0 - TABLE C1.
- Self weight of the panel has been allowed for, plus an allowance of max 25kg/m<sup>2</sup> for light duty fittings (lights, etc.). No other dead loads permitted.
- Non-trafficable maintenance access (concentrated load) of 140kg (exceeding min. requirements of AS/NZS 1170.1) on any one panel has been allowed for.
- Distributed live load of 0.25kPa (as per AS/NZS 1170.1) has been allowed for. Bondor® tests comply with details outlined in AS 4040.0, AS 4040.1, AS 4040.2, AS 4040.3, AS 1562.1 and AS/NZS 1170.1.
- Generic engineering certification of the SolarSpan® Patio System is available for residential patios.


### Joint

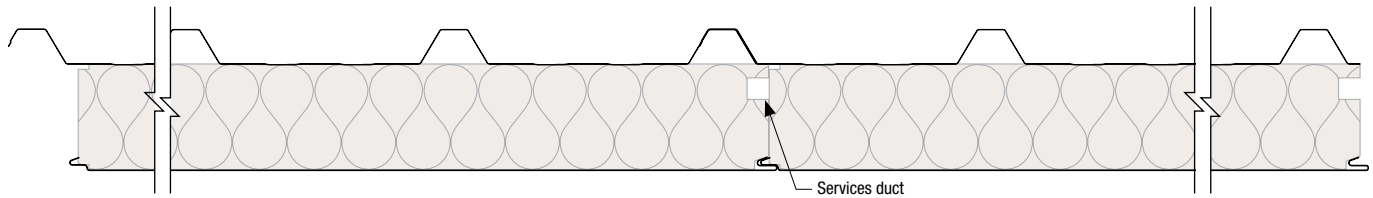

### Profiles

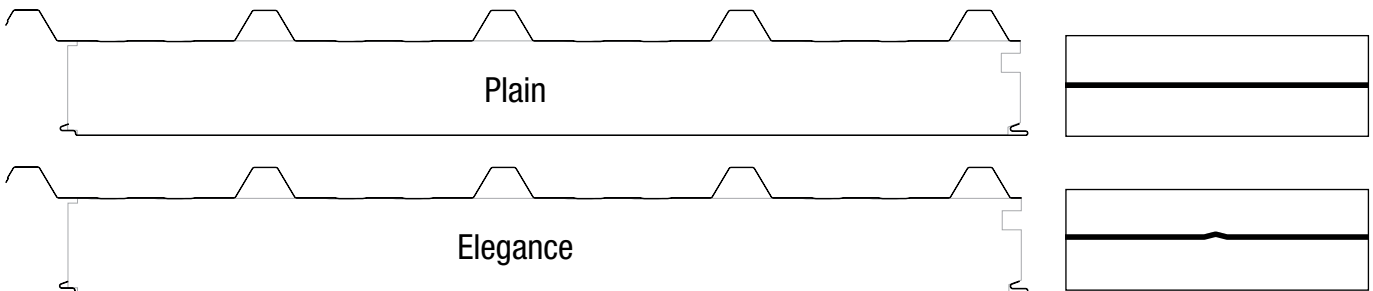

### Dimensions

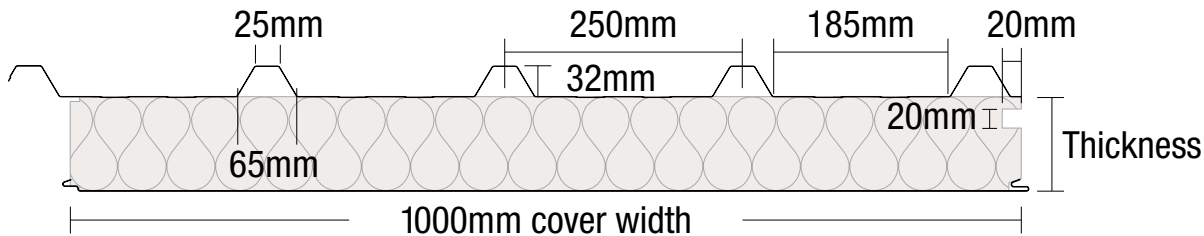

### Bondor® National Network

**BRISBANE / EXPORT**  
103 Ingram Road  
Acacia Ridge QLD 4110  
T: 07 3323 8500  
F: 07 3323 8501

**MELBOURNE**  
6 Dunmore Drive  
Truganina VIC 3029  
T: 03 8326 8000  
F: 03 8326 8099

**SYDNEY**  
49 – 53 Newton Road  
Wetherill Park NSW 2164  
T: 02 9609 0888  
F: 02 9729 1114

**PERTH**  
17 Gauge Circuit  
Canning Vale WA 6155  
T: 08 9256 0600  
F: 08 9256 0620

**ADELAIDE**  
70 – 72 Rundle Road  
Salisbury South SA 5106  
T: 08 8282 5000  
F: 08 8282 5099

**LAUNCESTON**  
7 Connector Park Drive  
Kings Meadows TAS 7249  
T: 03 6335 8500  
F: 03 6335 8544

To connect to your nearest Bondor® branch simply call 1300 300 099 or visit [www.bondor.com.au](http://www.bondor.com.au)

Metecno Pty Limited. ABN 44 096 402 934. The manufacturer reserves the right to change the specification without notice. Bondor®, Equitilt®, BondorPanel®, FlameGuard®, MetecnoPanel®, MetecnoInspire®, EconoClad®, MetecnoKasset®, InsulWall®, LuxeWall®, DesignerWall®, SolarSpan®, InsulRoof®, MetecnoSpan®, Purline®, CoolRoof®, Equideck®, InsulLiving®, Metecno are trademarks of Metecno Pty Limited. BlueScope, Colorbond®, Permagard® and colour names are trademarks of BlueScope Steel Limited. Microban® is a registered trade mark of the Microban Products Company. The colours shown in this publication have been reproduced to represent actual product colours as accurately as possible. However, given printing limitations, we recommend checking your chosen colour against an actual sample before placing orders. This advice is of a general nature only. Designers must provide for adequate structural performance and other Building Code requirements. This information is subject to change. Refer to Bondor® website for latest version. Consult Bondor® for your application.



Leaders in Thermal & Architectural Building Solutions